


MI-580R 5 GHz Digital Stereo Bodypack Receiver

Features

- Stereo / Mono / Mixed output modes.
- EQ settings to suit the users' preferences.
- A \varnothing 3.5 mm TRS jack provides left/right 100 mW @16 Ω output for earphones. Optional standard or professional \varnothing 3.5 mm TRS noise-isolating earphones are available.
- The patented battery compartment of the MI-580R can be inserted with two AA-type batteries or one rechargeable li-ion battery, charging via USB Type-C with the foolproof and safe charging circuit.
- The system offers Engineer Mode (ENG MODE) so the sound engineers have full control in any live performance.

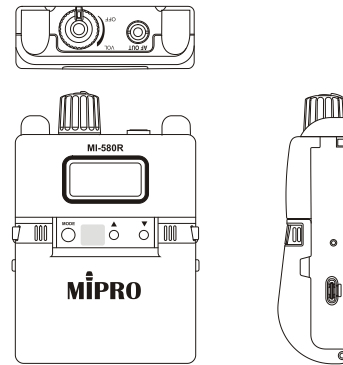

Specifications

Housing	Glass-fiber reinforced plastic
Display	Backlit LCD
Frequency Band	ISM 5.8 GHz
Modulation Type	Digital modulation
Channel Setting	ACT™ sync
Receiving Mode	True diversity
Latency	< 1.8 ms
Frequency Response	20 Hz – 23 kHz (stereo)
Stereo Separation	> 100 dB
S/N Ratio	109 dBA
THD	0.03% @ 1 kHz
Sensitivity	5 μ V input level, S/N > 100 dB
Earphone Jack	3.5 mm TRS
Battery Type	One 18500 Li-ion or two AA alkaline
Battery Charging	USB Type-C
Dimensions	63 × 95 × 25 mm (W × H × D)
Weight	Approx. 160 g
Optional Accessories	E-8S or E-8P earphones



MIPRO Electronics Co., Ltd

Headquarters: 814 Beigang Road, Chiayi, 600079, Taiwan
Tel: +886.5.238.0809 | Fax: +886.5.238.0803
www.mipro.com.tw | mipro@mipro.com.tw

Specifications are subject to change without prior notice. CE024/02